



A wheel-shaped thickness gauge made of stainless steel to check thickness of fresh and wet film.

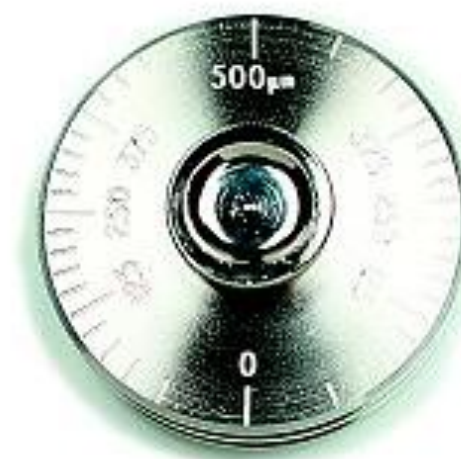

## Test method

The central circle is of smaller diameter and is eccentric of the two outer circles. By rolling the gauge through a wet coating, the centre disk eventually touches the film. This point on the scale indicates the thickness.

If the volume to solids ratio of the coating is known, then the wet film thickness can be used to predict the dry film.

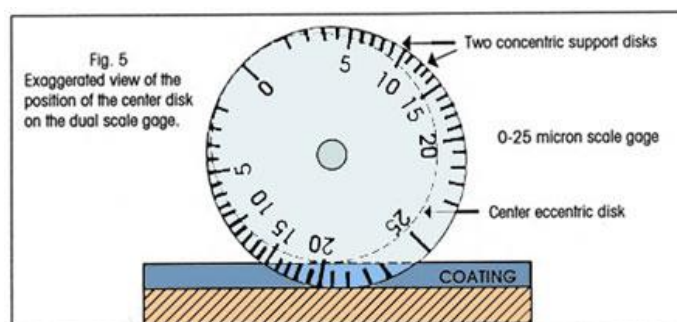

## Standard

ASTM D 1212, UNE EN ISO 2808:2007 y BS 3900/C5.

## Ordering

Reference	Scale Range
0220300	0 to 25 mils
0220000	0 to 50 mils
0219900	0 to 125 mils
0220100	0 to 250 mils
0220200	0 to 500 mils
0220400	0 to 1.000 mils

## Calibration

ZPEX037

WHEEL Calibration (5 to 10 points) with traceability