



KONICA MINOLTA

Spectrophotometer CM-700d (No Wireless)/ CM-600d (No Wireless)

New Generation Spectrophotometers with Colour LCD Screen



Giving Shape to Ideas

Compact and lightweight spectrophotometer for perfect handling!

Objective Quality Control of colour by instrumental assessment has proven to be reliable and affordable technology for any products where colour is an important quality criterion, as in the Paints & Coatings-, Plastics-, Automotive-, Home- Appliance-, Ceramics-, Textiles- and many other Industries. In addition, the increasingly global relationship between raw material suppliers, component manufactures, assemblers and buyers make precise colour data communication essential in a world which is ever more colourful.

The new generation of portable spectrophotometers from Konica Minolta offers unprecedented ease of use and perfect handling by utilising new technologies, enhanced ergonomics and applying Konica Minolta's known advanced optical design and signal processing technology.

Experience impressive colour measurement!

➔ Measure anything anywhere.

With the new devices you can measure any sample anywhere! The ergonomic vertical alignment is perfectly suited to position and measure round or even concave shaped parts and samples with single hand operation. Weighing only 550 g, the new devices are the most lightweight instruments in their class and thus allow excellent portability for on-site measurement. The measuring aperture is selectable between Ø 8 mm and Ø 3 mm to measure even small sample sizes (CM-700d (No Wireless) only).



➔ See colours in colour.

The new devices are portable colour measuring instruments with a colour LCD screen to improve colour data reading & perception. The 2.36-inch bright TFT display shows colour readings both in numerical or graphical mode to improve operability and understanding. Pseudo colour simulations to express colour difference or metamerism are also possible for rapid visual indication.




➔ Easy to operate.


The new devices also set new standards in ease of use and intuitive operation. Five dedicated buttons for the most important operations and displayed menu guidance in 6 languages make it easy to navigate through all functions and features. Data memory capacity allows users to store up to 1,000 targets and 4,000 measurement sets. With the "Auto target" function, the instrument searches for the closest target of any measured colour.

➔ Easy to read colour LCD screen.


Abundant information is displayed in colour for easy understanding. Measured colours can also be reproduced as colour patches on the colour LCD, which is useful to check the level of colour difference or to search for colours.



Spectral graph



Pseudocolour

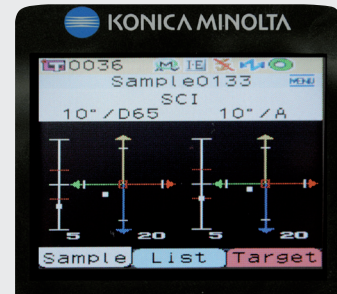

Colour difference graph


➔ More than you expect.

In addition to all the advanced technology, both models come with a full list of features and functions you can expect from the leader and pioneer in portable colour measurement:

1. Sphere geometry with simultaneous measurement (automatic switching) of specular components included ($di:8^\circ$) and excluded ($de:8^\circ$)
2. Powerful and long-life Xenon Flash illumination for maximum accuracy even on dark and saturated colours
3. Highest levels in Inter-Instrument- and Inter-Model-Agreement, essential for global colour data exchange
4. Choice of 3 power supply modes: Dry battery, rechargeable batteries (4 AA size) or AC Adapter for maximum flexibility
5. Automatic "Stand-by" power saving function mode



Model	CM-700d (No Wireless)	CM-600d (No Wireless)
Illumination / viewing system	di: 8°, de: 8° (diffused illumination, 8-degree viewing angle), SCI (specular component included)/SCE (specular component excluded) selectable with automatic switching (Conforms to CIE No. 15, ISO 7724/1, DIN5033 Teil7, ASTM E 1164, and JIS Z 8722)	
Size of integrating sphere	ø 40 mm	
Detector	Silicon photodiode array (dual 36-element)	
Spectral separation device	Diffraction grating	
Wavelength range	400 nm to 700 nm	
Wavelength pitch	10 nm	
Half bandwidth	Approx. 10 nm	
Reflectance range	0 to 175%, Display resolution: 0.01%	
Light source	Pulsed xenon lamp (with UV cut filter)	
Measurement time	Approx. 1 second	
Minimum measurement interval	Approx. 2 seconds (in SCI or SCE mode)	
Battery performance	With alkaline dry batteries: Approx. 2,000 measurements With nickel-metal-hydride rechargeable batteries (2,300 mAh): Approx. 2,000 measurements with full charge * Stand-alone continuous measurement fixed to either SCI or SCE mode at 10-second intervals at 23°C	
Measurement / illumination area	MAV: ø 8 mm / ø 11 mm SAV: ø 3 mm / ø 6 mm * Changeable by replacing target mask and selecting lens position	MAV: ø 8 mm / ø 11 mm only
Repeatability	Spectral reflectance: Standard deviation within 0.1%, Chromaticity value: Standard deviation within ΔE^*_{ab} 0.04 * When a white calibration plate is measured 30 times at 10-second intervals after white calibration	
Inter-instrument agreement	Within ΔE^*_{ab} 0.2 (MAV/SCI) * Based on 12 BCRA Series II colour tiles compared to values measured with a master body at 23°C	
No. of averaging measurements	1 to 10 (Auto averaging), 1 to 30 (Manual averaging)	
Display	2.36-inch TFT colour LCD	
Interfaces	USB1.1	
Observer	2° observer or 10° observer	
Illuminant	A, C, D ₅₀ , D ₆₅ , F2, F6, F7, F8, F10, F11, F12 (Simultaneous evaluation with two illuminants possible)	
Displayed data	Spectral values/graph, colorimetric values, colour difference values/graph, PASS/FAIL result, pseudocolour, colour assessment	
Colour spaces	L*a*b*, L*C*h, Hunter Lab, Yxy, XYZ, Munsell, and colour difference in these spaces (except for Munsell)	
Colorimetric data	MI, WI (ASTM E313-73/E313-96), YI (ASTM E313-73/ASTM D1925), ISO Brightness, 8° gloss value	
Colour difference formulas	ΔE^*_{ab} (CIE1976), ΔE^*_{94} (CIE1994), ΔE_{00} (CIE 2000), CMC (l: c)	
Storable data sets	Measurement data: 4,000 sets / Target colour difference data: 1,000 sets	
Pass/fail judgment	Tolerances can be set to colorimetric values (excluding Munsell), colour difference values, colour values (excluding 8° gloss value) respectively	
Power	Special AC adapter; 4 AA-size alkaline dry batteries or nickel-metal-hydride rechargeable batteries	
Size	73 (W) x 211.5 (H) x 107 (D) mm	
Weight	Approx. 550 g (without white calibration cap and batteries)	
Operating temperature / humidity range	5 to 40°C, relative humidity 80% or less (at 35°C) with no condensation	
Storage temperature / humidity range	0 to 45°C, relative humidity 80% or less (at 35°C) with no condensation	

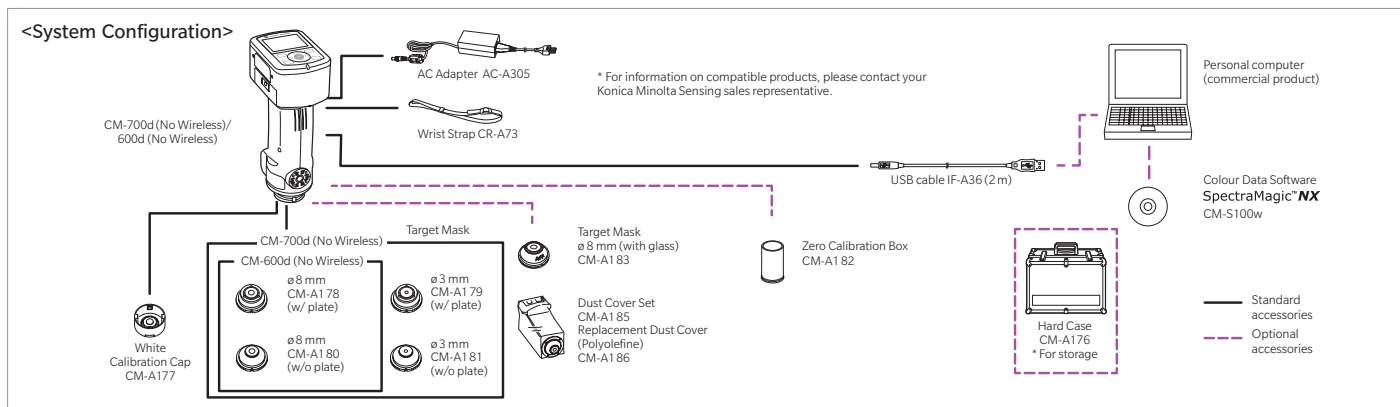

SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.
- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.

The specifications and drawings given here are subject to change without prior notice.

If you have any questions about specifications, please contact your Konica Minolta representative.

KONICA MINOLTA, INC
Konica Minolta Sensing Americas, Inc.

Osaka, Japan
New Jersey, U.S.A.

Konica Minolta Sensing Europe B.V.

European Headquarter
German Office
French Office
UK Office
Italian Office
Swiss Office
Polish Office
Turkish Office
Belgium Office
Nordic Office
SE Sales Division
Beijing Office
Guangzhou Office
Chongqing Office
Qingdao Office
Wuhan Office

Nieuwegein, Netherlands
München, Germany
Roissy CDG, France
Warrington, United Kingdom
Cinisello Balsamo, Italy
Dietikon, Switzerland
Wroclaw, Poland
Istanbul, Turkey
Zaventem, Belgium
Västra Frölunda, Sweden
Shanghai, China
Beijing, China
Guangzhou, China
Chongqing, China
Shandong, China
Hubei, China
Singapore
Goyang-si, Korea
Bangkok, Thailand
Thailand Representative Office

Konica Minolta (CHINA) Investment Ltd.

Konica Minolta Sensing Singapore Pte Ltd.
Konica Minolta Sensing, Inc.

Optics Company, Korea
Optics Company, Sensing Business
Thailand Representative Office

+1-888-473-2656 (in USA)
+1-201-236-4300 (outside USA)
+31 (0) 30 248-1193
+49 (0) 89 4357 156 0
+33 (0) 1 80-11 10 70
+44 (0) 1925 467300
+39 02 84948800
+41 (0) 43 322-9800
+48 (0) 71 734 52-11
+90 (0) 216-528 56 56
+32 (0) 2 7170-933
+46 (0) 31 7099464
+86-(0) 21-5489 0202
+86-(0) 10-8522 1551
+86-(0) 20-3826 4220
+86-(0) 23-6773 4988
+86-(0) 532-8079 1871
+86-(0) 27-8544 9942
+65 6563-5533
+82 (0) 2-523-9726
+66-2361-3730

marketing.SUS@konicaminolta.com

info.sensing@seu.konicaminolta.eu
info.germany@seu.konicaminolta.eu
info.france@seu.konicaminolta.eu
info.uk@seu.konicaminolta.eu
info.italy@seu.konicaminolta.eu
info.switzerland@seu.konicaminolta.eu
info.poland@seu.konicaminolta.eu
info.sensing@konicaminolta.com.tr
info.benelux@seu.konicaminolta.eu
info.nordic@seu.konicaminolta.eu
hcn_sensing@hcn.konicaminolta.cn
hcn_sensing@hcn.konicaminolta.cn
hcn_sensing@hcn.konicaminolta.cn
hcn_sensing@hcn.konicaminolta.cn
cn_sensing@hcn.konicaminolta.cn
ssg@konicaminolta.sg
sensing-gc@konicaminolta.jp
sensing-gc@konicaminolta.jp



Certificate No.: JQA-QMA15888
Registration Date: October 26, 2018
KONICA MINOLTA, Inc., Sakai Site
Product design, manufacture/manufacturing
management, calibration and service



Certificate No.: JQA-E-80027
Registration Date: March 12, 1997
KONICA MINOLTA, Inc., Sakai Site

Addresses and telephone numbers are subject to change without notice.

For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page: www.konicaminolta.com/instruments/network

